

MISAMP

Intensity control



Control module for a 3-phase motor with intensity control, controlled by a 24Vac remote control.


3-phase 200V-500V 50-60Hz supply. 3A maximum output.

Open - close inputs for the limit switches operation.

Current monitoring on the motor line: cut the signal on overload.

Exists in 3 versions: V1 (from 0.3 to 1.2A), V2 (from 0.9 to 1.8A) and V3 (from 2 to 3A).

Facilitated installation: integration into the motor, connexion by terminal block without tools, elimination of geared motor safety limit switches,...

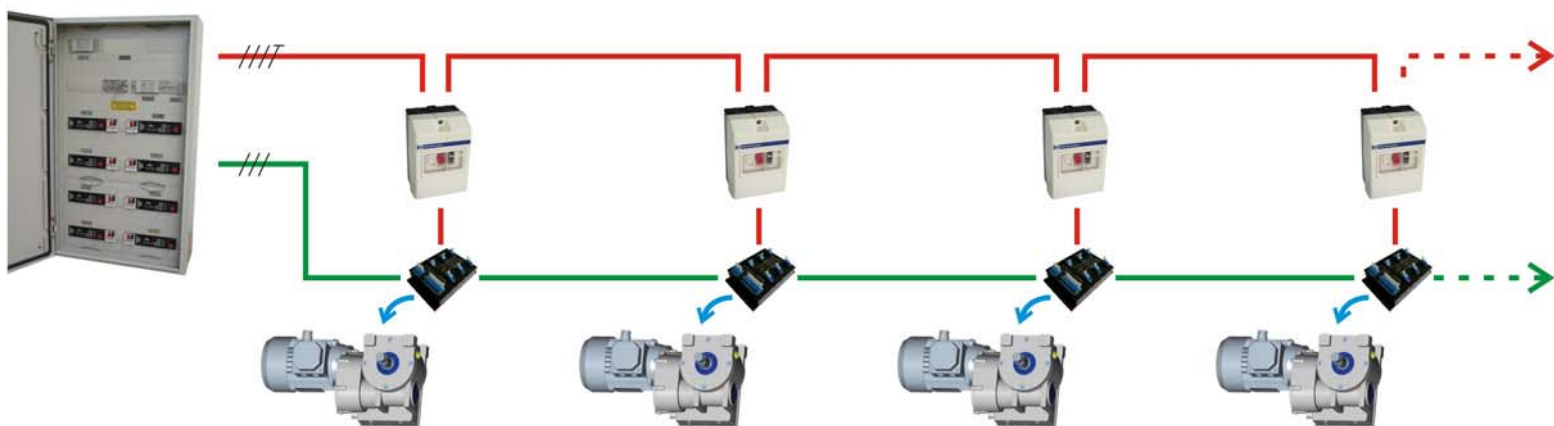

ANJOU AUTOMATION

518 rue Léo Baekeland - BP.57
85290 Mortagne-sur-Sèvre - France
Tel: 02 51 63 02 82 - Fax: 02 51 63 02 83
www.anjouautomation.fr
email: contact@anjouautomation.fr

**ANJOU
AUTOMATION**

L'innovation est notre culture